

Technical Datasheet – Basotect G+ (Black)

Product description

Basotect G+ is a light-grey, open-cell foam made of melamine resin

Delivery and storage

Basotect is manufactured in the form of untrimmed blocks with a thin outer skin. The standard dimensions of the blocks are 2500 x 1250 x 500mm. Special lengths can be produced upon request.

The blocks are delivered in film packaging and should be stored in a dry place. Direct and prolonged exposure to ultraviolet radiation should be avoided.

Prior to being processed, the blocks should be unwrapped and stored for a minimum of three days, preferably five days, in a standard conditioned atmosphere. The reason for this is the sorption behavior of the melamine resin. The dimensions of the blocks change as they absorb or release moisture.

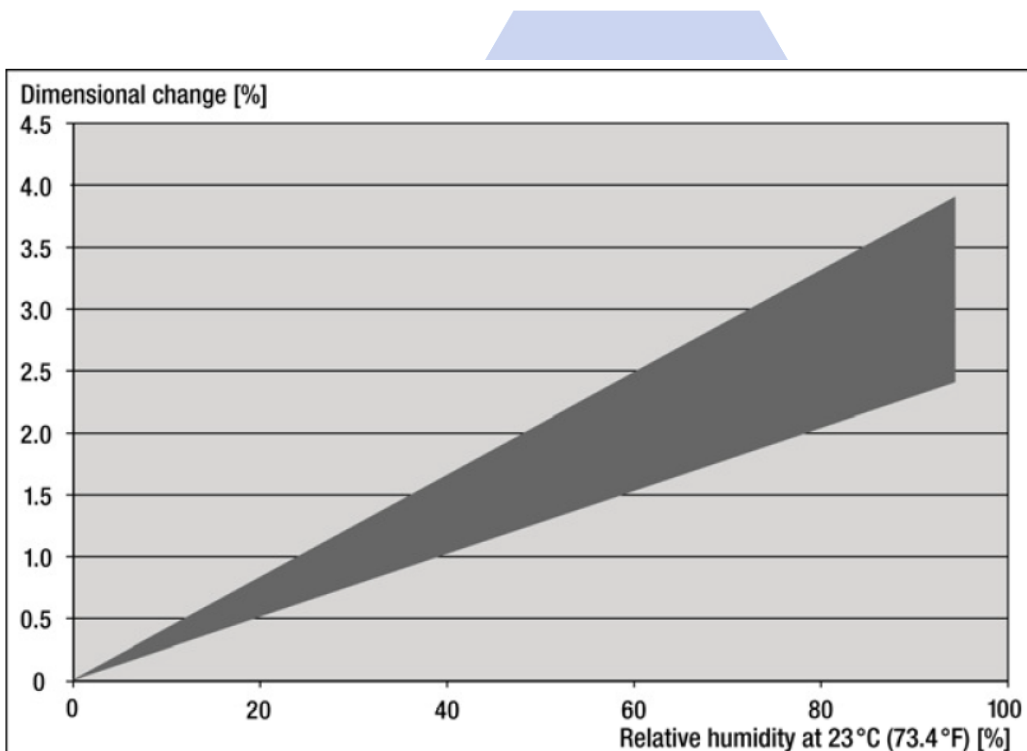


Diagram 1: Dimensional change as a function of the relative indoor humidity at an ambient temperature of 23°C [73.4°F]

Properties

The thermoset character and the open-cell structure of the melamine resin foam translate into an attractive property profile:

- High Sound absorption
- Low thermal conductivity
- High fire resistance
- Low density
- High long-term use temperatures
- No brittleness at low temperatures

Properties	Test Method	Unit	Tolerance	Value
Density	EN ISO 845	kg/m ³	±1.5%	9
Compressive strength	EN ISO 3386-1	kPa		>9
Tensile Strength	ISO 1798	kPa		>120
Elongation at break	ISO 1798	%		>18
Maximum application temperature	DIN EN ISO 2578	°C		
1.000hrs.				>200 (392)
20.000hrs.				>150 (302)
Fire Behavior				
Europe	EN 45545-2			Upon request
	EN13501-2			B/C
Germany	DIN 4102-1			B1
	DIN 5510-2			S4, ST2, SR2, FED ≤1
France	NF P 92-507			M1
	NF F 16-101			F4
USA	FMVSS 302			Compliant (0 mm/min)
	UL 94			V-0, HF1
	ASTM E 662			Upon request
	ASTM E 162			Upon request
	ASTM E 84			Upon request
	ASTM E 1354			Upon request
Great Britain	BS 476 part 7			Class 1
	BS 476 part 6			Upon request
	BS 6853 Annex D.8.4			Upon request
	BS 6853 Annex B2			Upon request
International	ISO 4589-2			Upon request
				Upon request

Diagram 2 shows the thermal conductivity of Basotect G+ as a function of the mean temperature. With its values of ≤ 0.035 W/mK at the 10°C. Basotect occupies a leading position among the commercially available insulating materials.

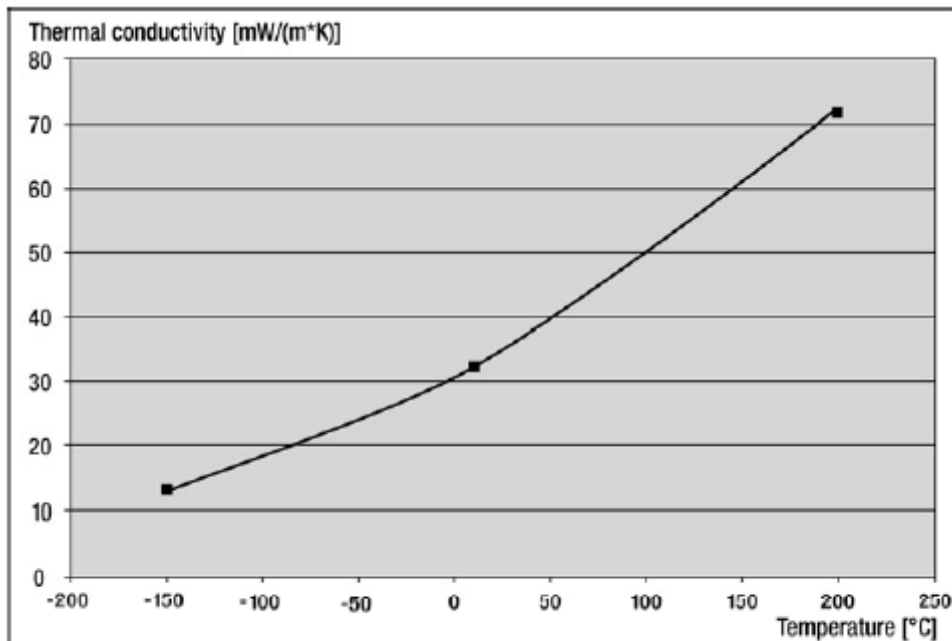


Diagram 2: Thermal conductivity of Basotect® G+. Measurement according to DIN EN 12667 or with the Lola 3 two-plate apparatus manufactured by ZAE Bayem of Würzburg, Germany

The test results from the acoustic experiments in an impedance tube according to ISO 10534-2 and in a reverberation room according to DIN EN ISO 354 are shown in Diagrams 3 and 4. In the medium and high frequency ranges, Basotect G+ exhibits an outstanding sound absorption behavior. At low frequencies, technical acoustic improvements can be achieved, for example, by means of additional heavy layers.

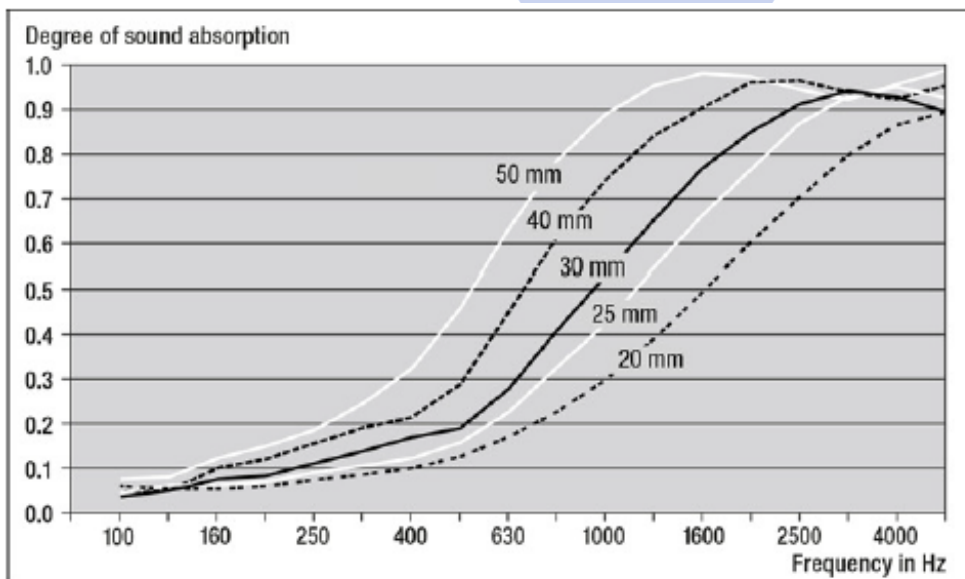


Diagram 3: Degree of sound absorption of Basotect® G+ as a function of the thickness, according to ISO 10534-2 (impedance tube).

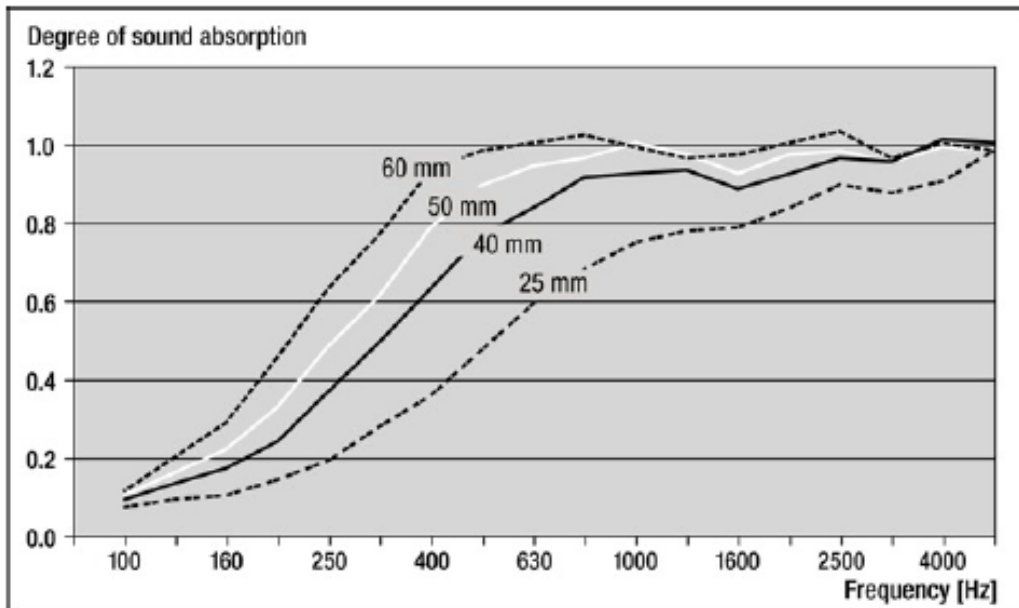


Diagram 4: Degree of sound absorption of Basotect® G+ as a function of the thickness, according to DIN EN ISO 354 (reverberation room)

According to DIN EN ISO 175, Basotect G+, as a thermoset material, is resistant to many media (Table 2). The compressive strength according to ISO 3386-1 (40% compression, 4th load cycle) and the change in sample geometry serve as evaluation criteria. The figures apply to a test temperature of 23°C.

Medium	Evaluation
Acids	
Formic acid 90%	-
Acetic acid 90%	+
Lactic acid 10%	+
Phosphoric acid 50%	+
Nitric acid 10%	-
Hydrochloric acid 10%	-
Sulfuric acid 10%	-
Citric acid 10%	+
Other chemicals	
Sodium hypochlorite	+
Sodium chloride solution 3.6%	+
Water	+
Hydrogen peroxide 30%	+
Hydrocarbons	
Gasoline	+
Diesel	+
Kerosene	+

Lyes	
Ammonia water 25%	+
Sodium carbonate 25%	+
Sodium hydroxide solution 40%	+
Esters	
Butyl acetate	+
Ethyl acetate	+

Product Safety and environmental

Basotect is produced without the use of halogenated hydrocarbons. The product is not the hazardous to water. Basotect is delivered free of blowing agents and is not subject to labelling requirements under the German Hazardous Material Regulations.

Waste from Basotect can be recycled for purpose of the heat and material recovery. Flake composite foams made of the same material and having densities ranging from 25 – 100 kg/m³ exhibit outstanding sound absorption in the lower and medium frequency ranges. Loose flake filling has already been successfully installed in hollow spaces of suspended ceilings with the objective of improving their acoustic properties. Flakes made of Basotect have also already been used as a binder for liquids.

Additional technical

Detailed technical information can be obtained from:

BASF SE

GBU Specialty Plastics



Safety

The information and instructions provided in the **Safety Data Sheet** have to be adhered to when this product is handled. For the rest, all preventive and occupational-safety protection measures that apply to the handling of chemicals must be observed.

Note

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suit-ability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights, etc. given the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.